


1/8

Fig. 1

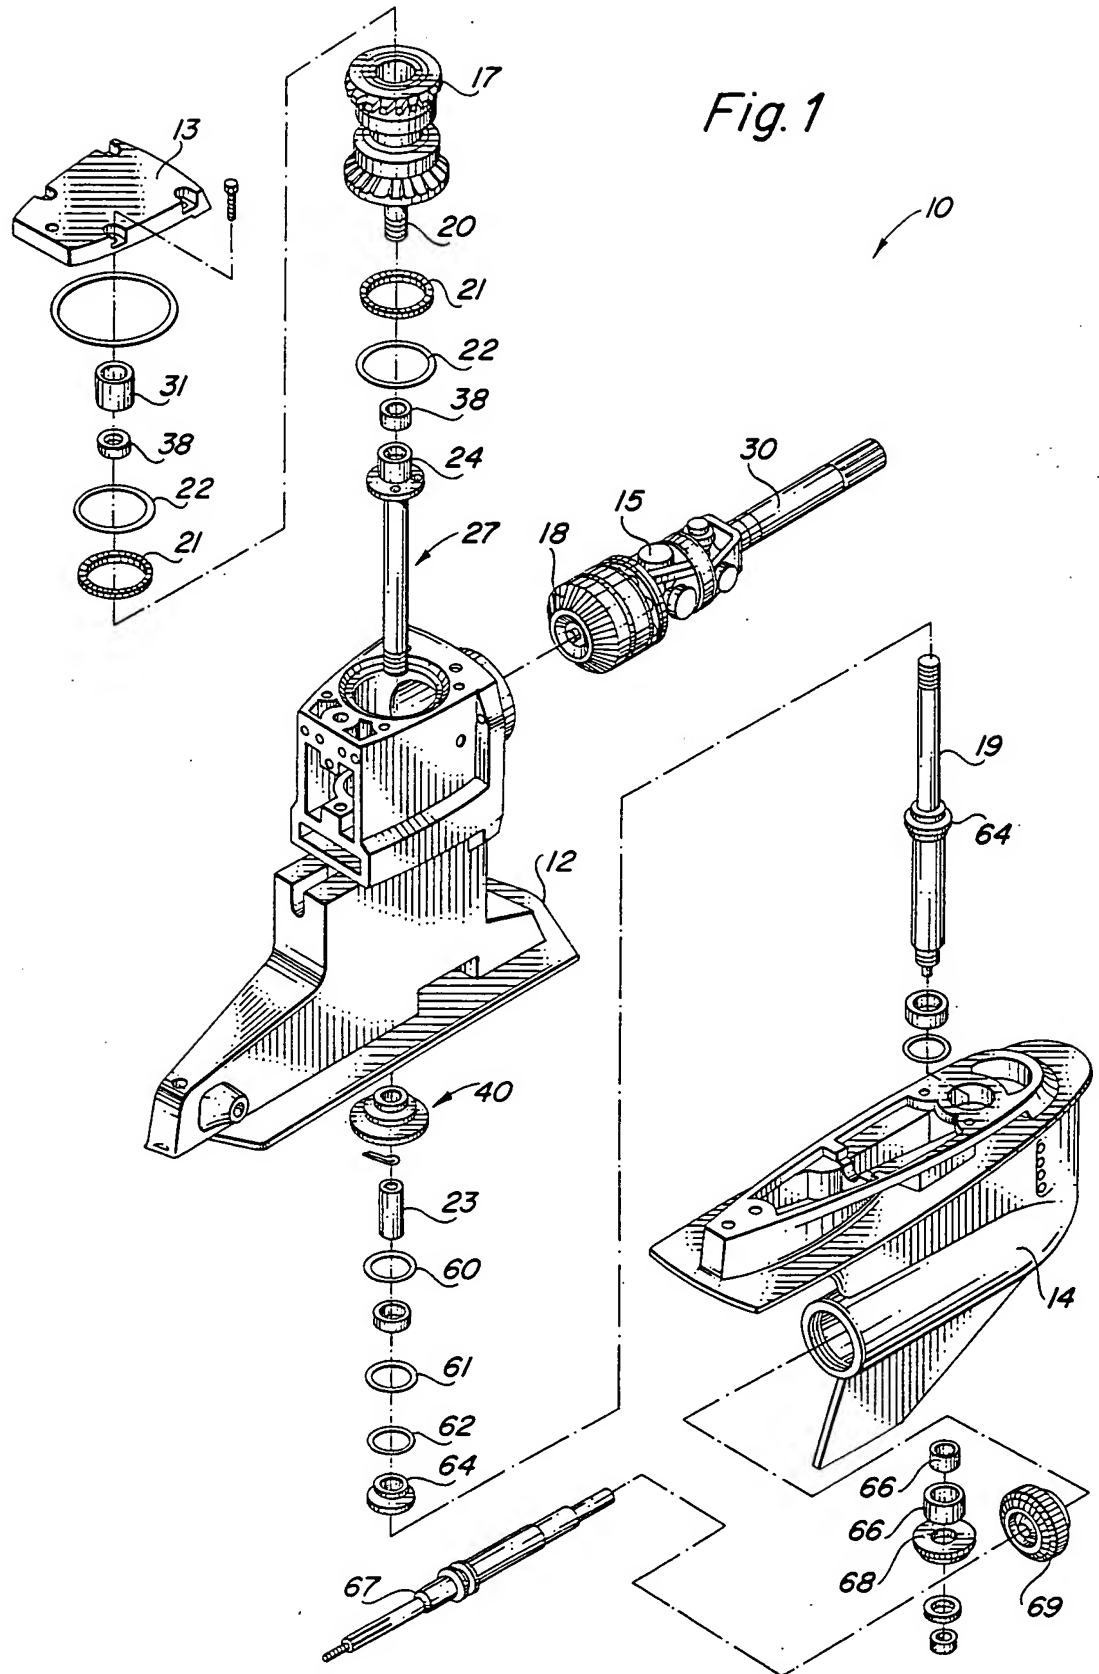

APPROVED	O.G. FIG.	
DRAFTSMAN	CLASS	SUBCLASS

JUL 09 1993
 PATENT & TRADEMARK OFFICE

2/8

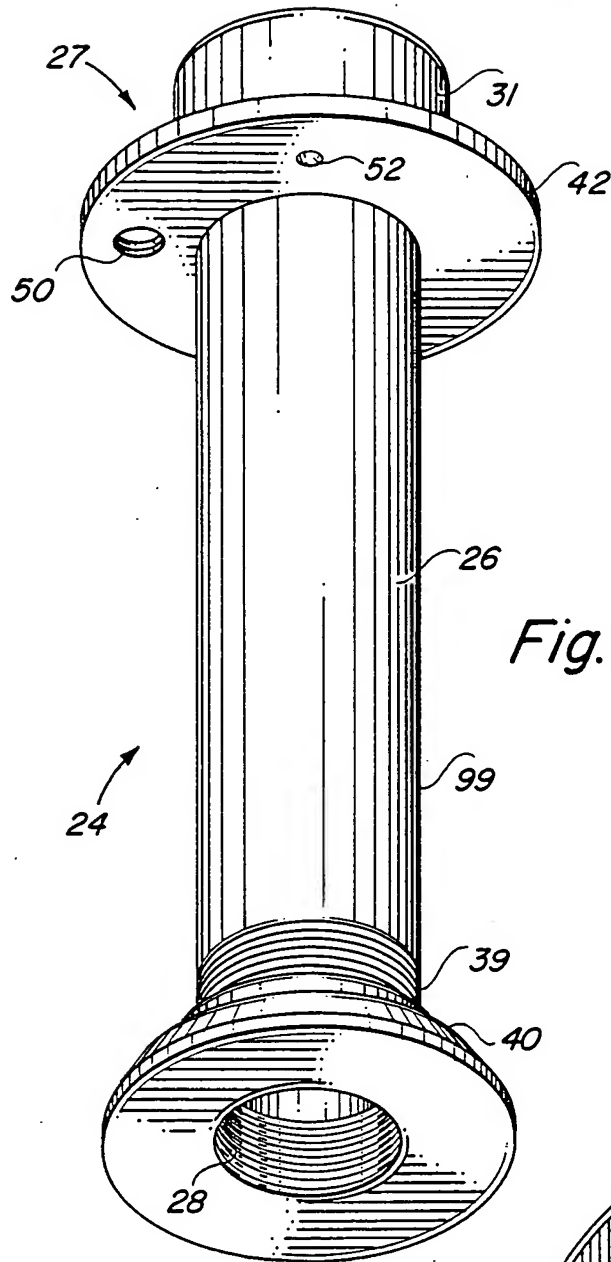


Fig. 2


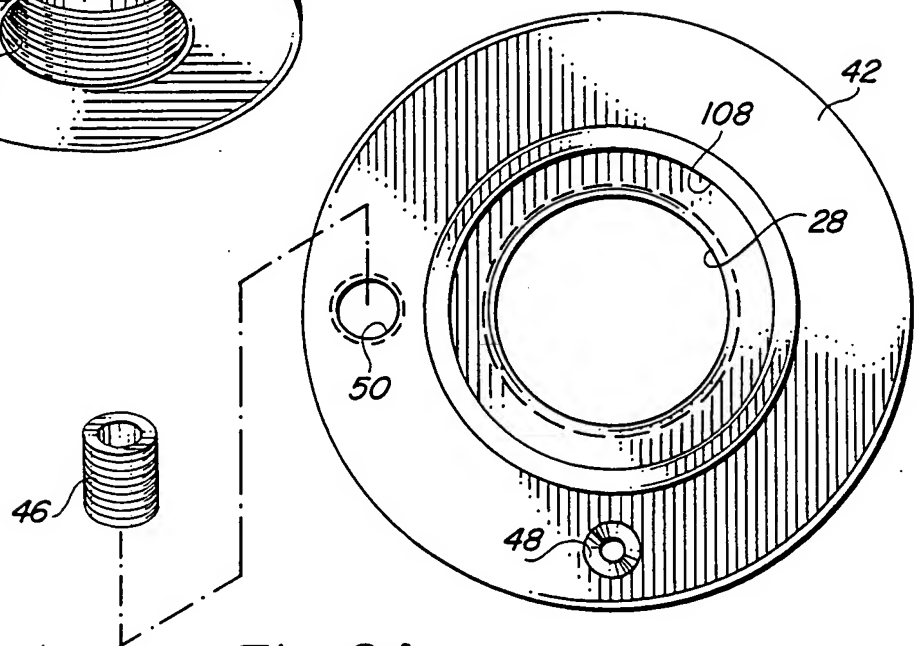


Fig. 2A



3/8

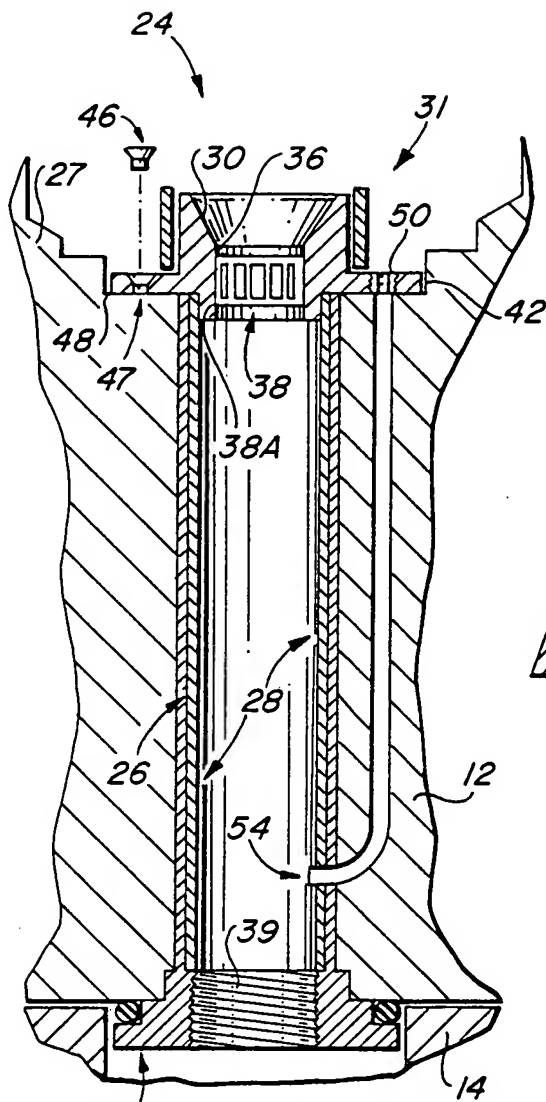


Fig. 3

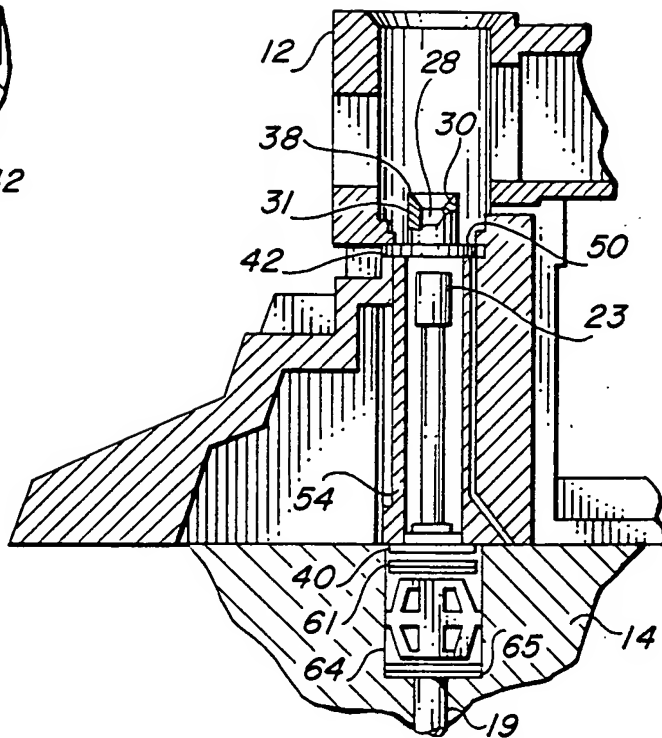


Fig. 5

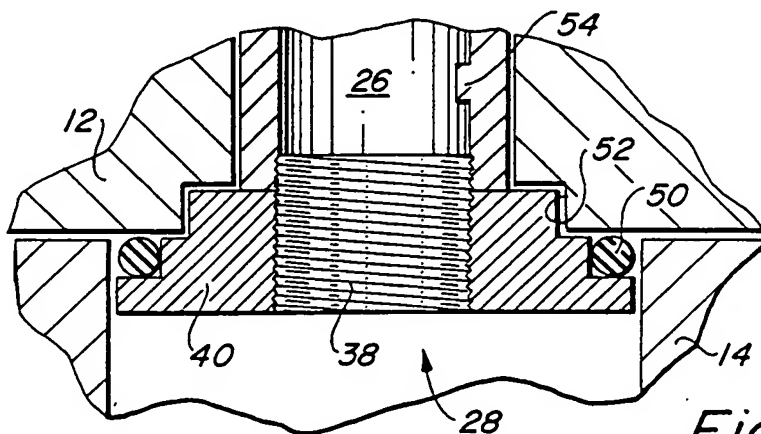
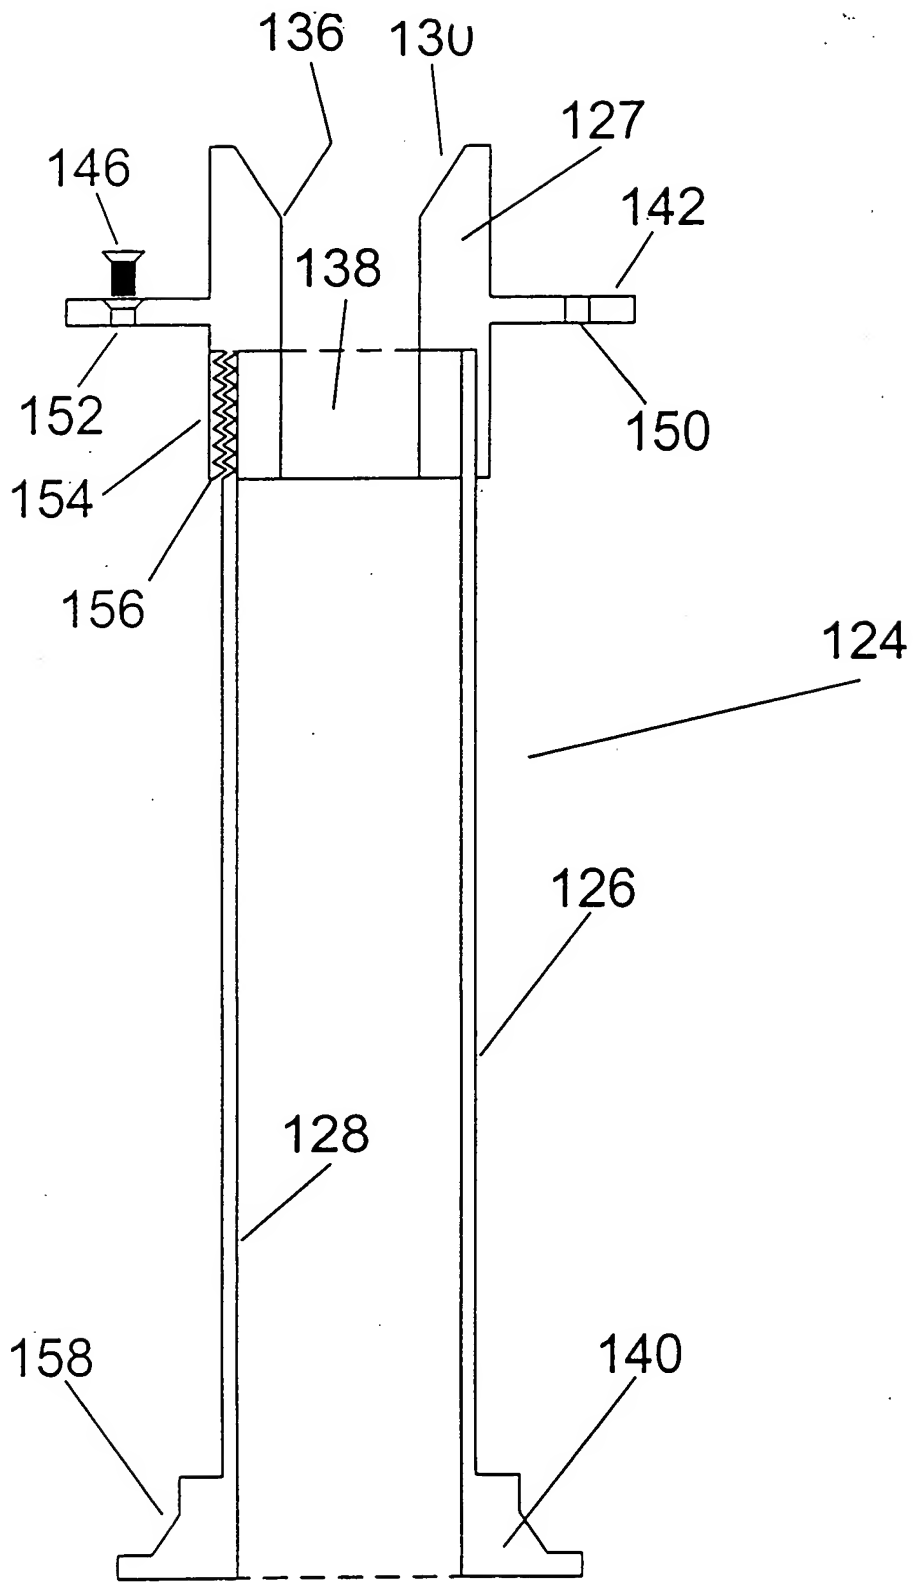


Fig. 4

Fig. 6






Fig. 7


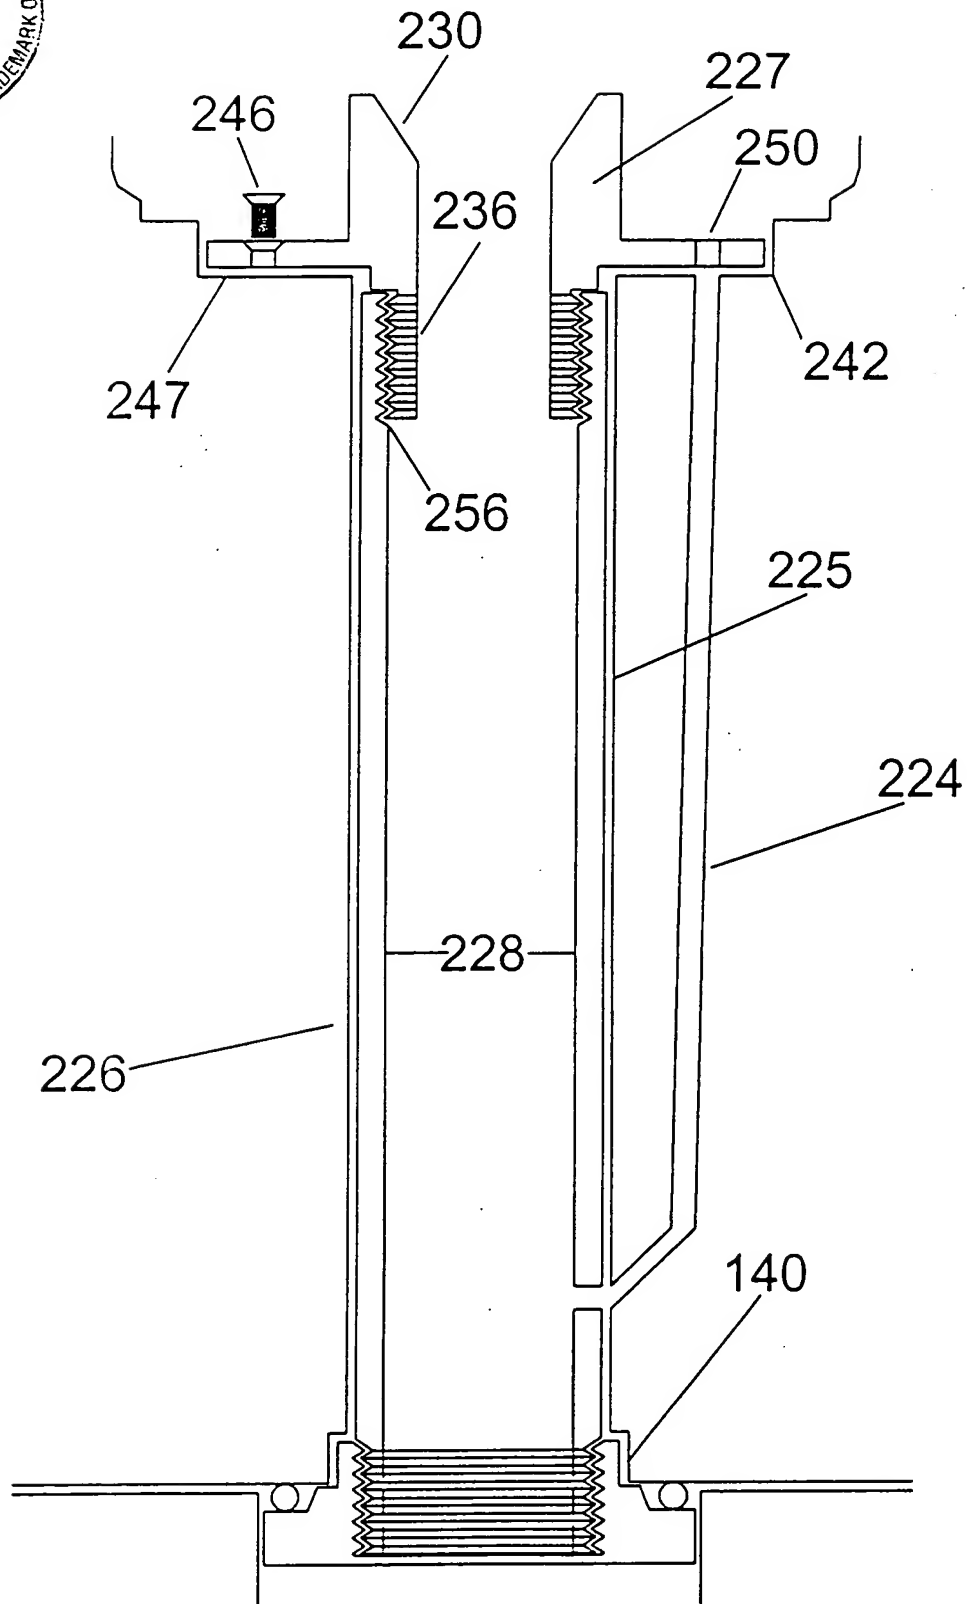




Fig. 8

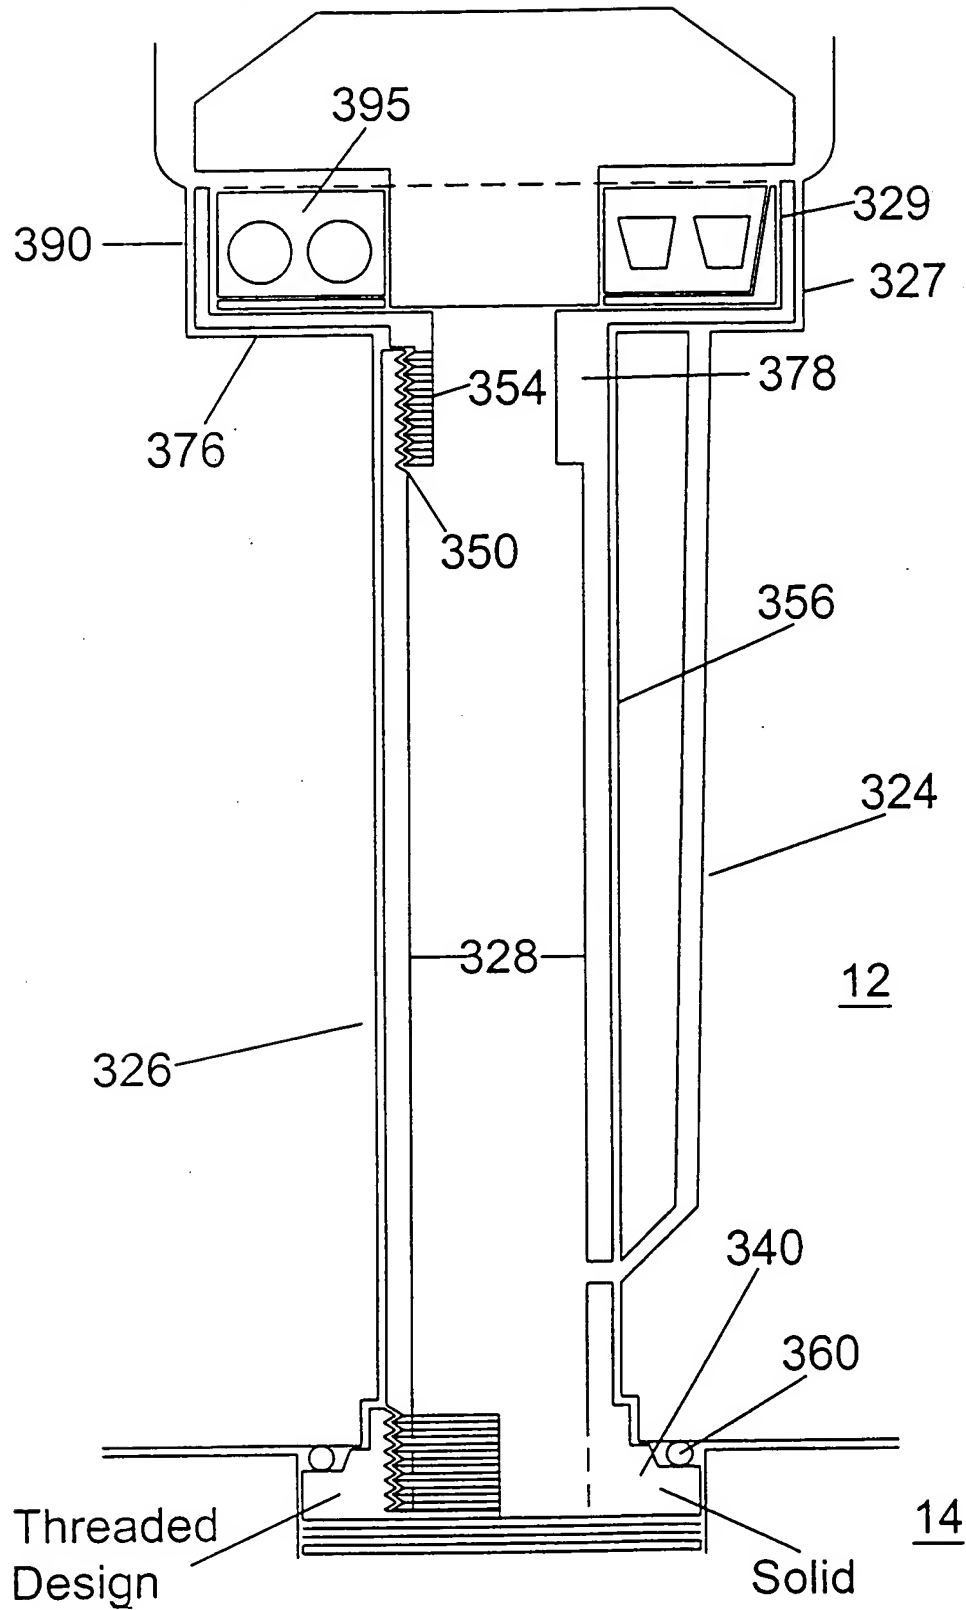

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

Tower Designs

A 1-3
B 1-3
C 1-3

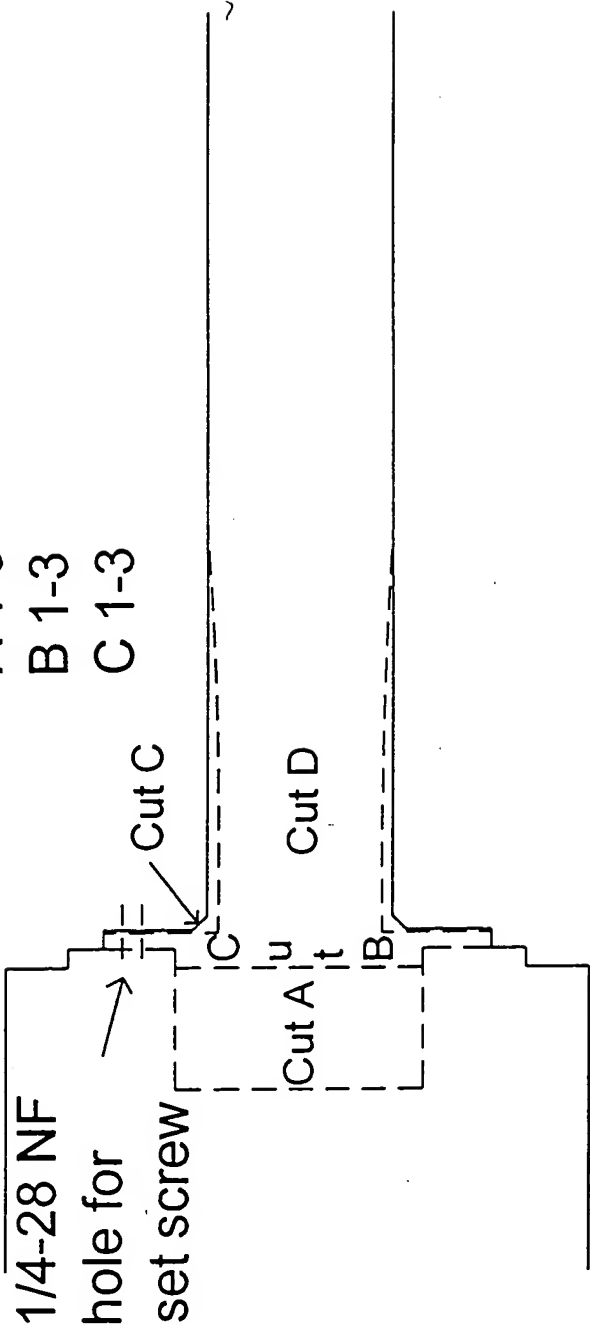


Fig. 9

Cut A

Removes cast aluminum bearing / gear support for chromoly bearing tower & case support

Cut B

Removes .100-.200" in depth @ 3.20 dia. for tower disc. section & setscrew is drilled and threaded.

Cut C

60° chamfer cut for precise fit.

Cut D

Removes top of taper casting to 1.580"-1.65" to accept chromoly tower shim/sleeve insert through upper case for additional support.



APPROVED	C.G. FIG.
BY	CLASS SUBCLASS
DRAFTSMAN	

JUL 0 9 2003

PATENT & TRADEMARK OFFICE

8/8

Fig. 10

TOWER DESIGNS
D 1-5

